




Alcares Solas Lifebuoy Light



Test button

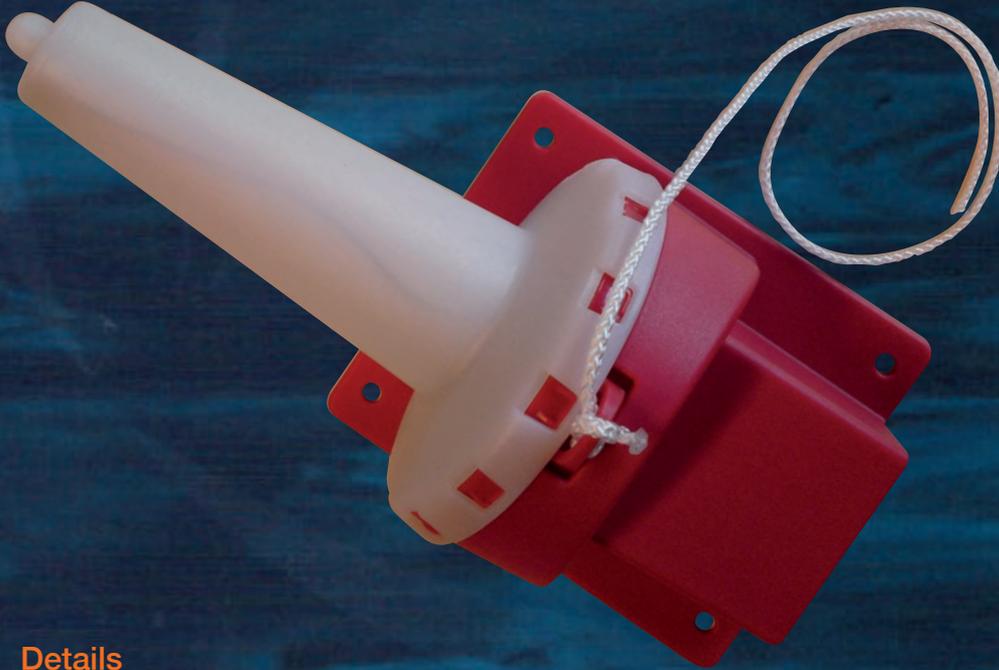

bracket

Details

The Solas approved Alcares lifebuoy light is lightweight and easily deployable and automatically activated when in contact with water. The unique design ensures the light source is raised further from the water with a light intensity far in excess of the 2 candela requirement. Housed in a sealed tamper free enclosure and powered by an alkaline battery the unit requires no servicing and has a 5 year storage life.

Specifications

- Light intensity minimum 2 Candela
- Flash rate 51 flash/minute, Flash length 0,31 seconds
- Operational life: minimum 2 hr.
- Battery: Alkaline, 5 years storage life (-30°C to +65°C)
- Test button emits short sequence light flashes
- Waterproof
- Operational temperature -1°C to +30°C
- Size bracket: 110mm x 110mm x130mm (LxWxH)
- Size light: 210mm high, 96mmØ
- Weight total: 253g
- Material: polycarbonate
- Approvals: SOLAS MED 96/98/EC

Service

- Sealed tamper free unit
- Alkaline battery requires no further servicing
- Manufacture date and expiry date clearly labelled
- 5 year storage life



Certificate No. 1147/96



Members



0062



Product Approvals

Worldwide approval list available on request